


Ashland™ PolyTrap™

High Density Polyethylene Interceptor for Commercial and Industrial Use

The Ashland APCI Series Interceptor is designed to separate grease, oils, fats and other sediment from large Commercial and Industrial sources. Made of High Density Polyethylene (HDPE), the APCI series interceptor is lightweight, cost efficient, extremely durable and corrosion free. Non skid 3/4" poly covers are standard, but all units are available with steel non-skid tread plates and optional recessed handles for

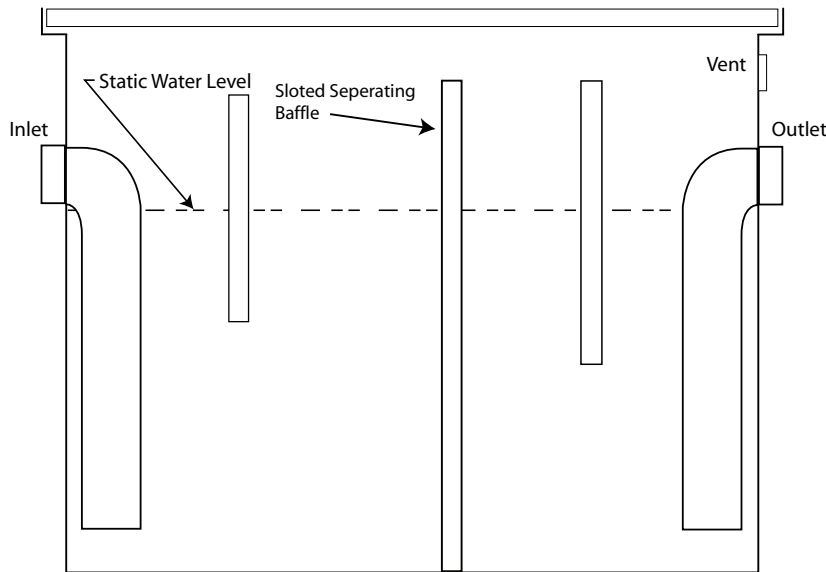

*Design varies slightly by model

traffic areas. The HDPE construction is acid resistant and solids do not easily adhere to the smooth walls, making cleaning effortless.

Options Include:

- Above or below ground installation
- 1/4" Steel Cover for pedestrian traffic
- 1/2" reinforced cover for heavy traffic
- Recessed Lift Handles.
- Integral Extension.
- Sediment Basket
- Optional Connection Sizes 2, 3, 4, 6 inch
- PVC glued connections are standard.

Special sizes available to fit through narrow passages or existing walkways. Special units also available to meet larger capacities, including systems that utilize series and/or parallel interceptors. Straight through, left, and right hand models available.

DIMENSIONS & SPECIFICATIONS (approx. due to plastic variances)

Model Number		APGI-100	APGI-150	APGI-200	APGI-250	APGI-350
Flow Rate		100	150	200	250	350
Grease Capacity (lbs.)		250	375	500	625	850
Approximate Dimensions (inches)	Length	53	65	53	77	77
	Width	29	28	41	41	41
	Height	32	38	49.5	49.5	61
Bottom of Unit to center of Inlet		24	31	42	42	53
Bottom of Unit to center of Outlet		24	31	42	42	53
Bottom of Unit to center of vent		NA	34	45	45	57.5
Vent Connection (in.)		NA	2	2	2	2
Approximate Weight (lbs.)		150	200	300	350	400
Standard Inlet/Outlet (in.)		3"	4"	4"	4"	6"
Liquid Holding Capacity (gal)		112	180	300	405	560

Call about small standard size Interceptors / Traps for grease, oil, solids, lint & hair.

GreaseTrapSales.com

PH. 800.476.7930 ~ email: sales@greasetrapsales.com ~ Fax. 800.326.5531